



Europäisches
Patentamt

European
Patent Office

Office européen
des brevets

#2

EPO - DG 1

EP 00/4730

10/018253

05. 06. 2000

(90)

4
Bescheinigung

Certificate

Attestation

REC'D 27 JUN 2000

WIPO

PCT

Die angehefteten Unterla-
gen stimmen mit der
ursprünglich eingereichten
Fassung der auf dem näch-
sten Blatt bezeichneten
europäischen Patentanmel-
dung überein.

The attached documents
are exact copies of the
European patent application
described on the following
page, as originally filed.

Les documents fixés à
cette attestation sont
conformes à la version
initialement déposée de
la demande de brevet
européen spécifiée à la
page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

99201951.3

**PRIORITY
DOCUMENT**
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

DDI0DITV

Der Präsident des Europäischen Patentamts;
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets
p.o.

I.L.C. HATTEN-HECKMAN

DEN HAAG, DEN
THE HAGUE, 24/05/00
LA HAYE, LE



Europäisches
Patentamt

European
Patent Office

Office européen
des brevets

Blatt 2 der Bescheinigung
Sheet 2 of the certificate
Page 2 de l'attestation

Anmeldung Nr.:
Application no.: 99201951.3
Demande n°:

Anmeldetag:
Date of filing: 18/06/99
Date de dépôt:

Anmelder:
Applicant(s):
Demandeur(s):
N. V. BEKAERT S.A.
8550 Zwevegem
BELGIUM

Bezeichnung der Erfindung:
Title of the invention:
Titre de l'invention:
High temperature and corrosion resistant filter

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s) revendiquée(s)

Staat:
State:
Pays:

Tag:
Date:
Date:

Aktenzeichen:
File no.
Numéro de dépôt:

Internationale Patentklassifikation:
International Patent classification:
Classification internationale des brevets:
B01D39/20, B01D46/24, F01K23/06

Am Anmeldetag benannte Vertragsstaaten:
Contracting states designated at date of filing: AT/BE/CH/CY/DE/DK/ES/FI/FR/GB/GR/IE/IT/LI/LU/MC/NL/PT/SE
Etats contractants désignés lors du dépôt:

Bemerkungen:
Remarks:
Remarques:



18.06.1999

Field of the invention.

(78)

The invention relates to a high temperature and corrosion resistant filter and to the use of such a filter for the filtration of hot gases.

Background of the invention.

Hot gas filtration is for example used in the furnace exhaust of gases resulting from the combustion of fossil fuels. These fuels contain many impurities. Many filters have been used to reduce or eliminate the impurities in such furnace exhaust gases. However, there is still a need for improved filters which are capable of withstanding higher temperatures and pressures for removing particulates from hot combustion gases.

Especially in coal-fired power generation systems and more particularly in combined cycle power technologies, there is a big need for high temperature resistant and corrosion resistant filters. These technologies are based on the combustion and gasification of coal whereby the gas turbine is driven by the coal-derived gas.

Typical combined cycle power systems are pressurized fluidized bed combustor (PFBC) based systems, integrated gasification combined cycle (IGCC) based systems and hybrid cycle based systems. Some of these systems are already in operation, others are in development or at the demonstration stage.

A critical step in all these systems is the filtration of hot gases for the removal of particulates and other contaminants.

In these technologies, an effective and reliable hot gas filtration is of the utmost importance not only to meet the environmental emission requirements but also to protect the gas turbine components against fouling and erosion.

For such systems high performance, reliable hot gas filtration systems operating at high temperatures (200 – 900 °C) with a high corrosion resistance are required.

Particulates and contaminants such as sulfur, alkali metals and heavy metals have to be removed by the filter. Also the concentration of hydrogen halides such as HCl and HF is preferably low to protect the

-2-

components of the turbine. This can be a serious problem when high chlorine coals are gasified.

Up to now, the filtration of gases is a limiting factor for coal-fired combustion systems, because there are no filters which meet the above mentioned requirements.

5

Presently available filters for the filtration of hot gases are for example ceramic filters. A considerable drawback of this type of filters is their limited temperature range (250 – 450 °C) in which they can be operated. Ceramic filters also have the disadvantage that they suffer from thermal fatigue and high temperature corrosion, particularly in high temperature oxidising environments. The service life of ceramic filters is limited because the gas phase may react with the amorphous binder phase and because of oxidation of non-oxide based ceramics. Phase transitions may further put restrictions on the service life of such filters. Still another drawback of ceramic filters is their limited shock resistance, either mechanical or thermal shock resistance. This can cause problems, for example during pulse cleaning.

10

15

20

25

An alternative for ceramic filters is the use of metallic filters. However, the known metallic filters feature the disadvantage that they are only suitable in reducing environments at low or intermediate temperatures (350 – 600 °C). When these filters are exposed to an oxidising environment, they suffer considerably from corrosion. Also impurities, such as sulfur or sulfur containing compounds or hydrogen halides may only be present in low concentrations in order to avoid corrosion.

WO 9532048 describes a filter comprising FeAl or FeAl₃ powder. The resistance is improved when a certain amount of Cr is added.

30

-3-

Summary of the invention.

It is an object of the present invention to avoid the drawbacks of the prior art.

5 It is another object to provide a filter with a high temperature resistance and a high corrosion resistance, suitable for the filtration of hot gases.

It is also an object to provide a filter which can be used both in an oxidising or in a reducing atmosphere.

10 It is a further object to provide a filter which can withstand repeated temperature cycles and which has a high resistance against thermal and mechanical shocks.

Moreover, the invention aims to provide a filter having a high filter performance, a high reliability and a long-term durability.

15 According to a first aspect of the present invention a high temperature and corrosion resistant filter is provided. This filter comprises a filter medium and filter caps. The filter medium comprises at least one layer of metal fibers which has been sintered. Both filter caps and metal fibers are made from an iron-chromium-aluminium (Fe-Cr-Al) based alloy.

20 The diameter of the metal fibers is preferably between 4 and 30 μm , more preferably the diameter is between 8 μm and 22 μm .

The weight of the filter medium is preferably between 600 and 1500 g/m^2 and more preferably between 750 and 1200 g/m^2 . The filter medium has a porosity between 60 and 85 % and preferably between 65 and 80 %.

25 In order to improve the resistance of the filter a protective Al_2O_3 layer may be formed on the surface of the filter medium and on the other elements being part of the filter. This protective layer may be obtained by preoxidising the filter.

30 In one embodiment the filter medium comprises a non-woven layer of metal fibers. The web is sintered and preferably compacted. Further the sintered medium is welded to form the filter.

In another embodiment a filter medium comprising at least a first and a second layer is provided. Each layer comprises a web of metal fibers. The first layer, at the flow in side of the filter medium comprises metal fibers with a diameter between 4 and 12 μm . The diameter of the fibers of the second layer, this is the layer at the flow out side, is between 12 and 30 μm .

It is preferred that the weight of the first layer is between 20 and 60 % of the total weight of the filter medium. More preferably the weight of the first layer is between 40 and 60 % of the total weight.

The first and second layer are brought into contact with each other to form a layered structure. This layered structure is sintered and compacted. In a subsequent step, the sintered and compacted filter medium is welded to form the filter.

In a preferred embodiment a mesh is fixed to the filter medium as a support layer.

The mesh may be fixed to the layer situated at the flow out side.

In an alternative way the mesh may be sandwiched between a first and a second layer of metal fibers.

The layered structure comprising the layer or layers of metal fibers and comprising the mesh is then sintered in a subsequent step.

As mentioned before, all components being part of the filter such as the metal fibers, the filter caps, and when a mesh is present also the mesh, are made from an Fe-Cr-Al based alloy.

A first group of Fe-Cr-Al based alloys comprises 15 to 25 % Cr and 4 to 6 % Al. Preferably the Al content is between 4.8 and 5.7 %.

A preferred alloy composition is an Fe-Cr-Al based alloy further comprising Y. This alloy is known as Fecralloy®.

The Y content ranges from 0.03 to 0.5 % and is preferably between 0.08 and 0.35 %. Most preferably the Y content is between 0.25 and 0.35 %.

-5-

An other possible alloy composition is an Fe-Cr-Al based alloy further comprising at least one additional element selected from the group consisting of Sc, Y, Ti, Zr, Hf, V, Nb, Ta and the lanthanides, for example La or Ce.

5 The content of the additional element or the sum of the additional elements is between 0.01 and 1%.

10 A second group of Fe-Cr-Al based alloys comprises up to 15 % Cr and 20 to 60 % Al. These alloys further comprise at least one additional element selected from the group consisting of Sc, Y, Ti, Zr, Hf, V, Nb, Ta and the lanthanides.

The Fe-Cr-Al based alloys show good corrosion resistance and high temperature resistance characteristics.

15 This resistance may further be improved by the presence of an oxide layer, more particularly an Al_2O_3 layer on the surface. Such a protective oxide layer limits the further oxidation of the metal since the oxygen can not diffuse through the Al_2O_3 layer. To obtain the desirable protection, a dense Al_2O_3 layer with a sufficient thickness is preferred.

20 During operation an oxide layer is formed spontaneously on the outside by oxidation of Al to Al_2O_3 .

Alternatively, the alloy may be preoxidised under controlled conditions to form an Al_2O_3 protective layer. This preoxidation is preferably carried out
25 in a furnace at a temperature between 1000 °C and 1200 °C and more preferably at a temperature between 1100 °C and 1200 °C.

30 Either in the case of the spontaneous oxidation or in the case of the controlled preoxidation, a protective Al_2O_3 layer is formed on the surface of the filter medium. However, the structure of the Al_2O_3 layer formed in the two situations is different : the spontaneous formed Al-oxide has a θ -structure, while the Al-oxide formed during the preoxidation step under

the above mentioned conditions has predominantly an α -structure. By the term 'predominantly' is meant that there may be occasionally some defects. Although, when the oxide layer is formed at a temperature between 1100°C and 1200°C, the oxide layer shows almost no defects. This is in contrast with oxide layers formed at lower temperatures for example at 1000 °C, these oxide layers contain at least to some extent θ - Al_2O_3 and show much more defects. The quality of the Al_2O_3 layer further deteriorates when the oxidation is carried out at still lower temperatures.

The spontaneous formed Al_2O_3 (θ -form) has a rather porous structure. This oxide protection layer does not give the material a sufficient protection, especially not in a reducing atmosphere or when the material is subjected to thermal cycles.

The α - Al_2O_3 on the contrary has a denser structure. Therefore, the α -form gives a much better protection, than the porous θ -form. This layer of α - Al_2O_3 is giving an excellent protection, even in a reducing atmosphere at high temperatures.

The alloy may show the tendency for the oxide to spall. The spalling can be a serious problem when the alloy is subjected to repeated thermal cycles. The spalling of the protective scale can however be limited and even be avoided when a certain amount of Y is added to the alloy.

Therefore, a concentration of Y ranging from 0.03 % to 0.5 % is desired.

More preferably, the Y concentration is between 0.25 % and 0.35 %.

Also the addition of traces of an element such as Sc, Y, Ti, Zr, Hf, Nb or a lanthanide improves the functional characteristics at high temperatures.

The filters may be flat filters, although candle filters and tubular filters are preferred.

A filter candle is a cylindrical tube with porous walls, closed at one end.

-7-

Tubular filters are cylindrical tubes open at both ends.

A typical candle filter or tubular filter has an overall length between 1 and 2 m, for example 1.50 m, a wall thickness between 0.2 and 0.8 mm and an outside diameter of for example 60 mm.

5

Usually a filter system comprises a large number of filter elements, mostly arranged in multiple arrays. Typical numbers are 800, 1500 or 9600. The volume of the gas to be filtered and the filtration velocity achievable influences the necessary number of filter elements. The number of filter elements is different for the different technologies, such as IGCC or PFBC.

10

Filters comprising metal fibers furthermore have the advantage that they have a high resistance against thermal and mechanical shocks. The filters according to the invention may withstand frequent thermal cycles without problems.

15

The cleaning of metal filters is easier than the cleaning of for example ceramic filters or filters comprising metal powder. The filters may easily withstand repeated cleaning such as pulse cleaning. This results in filters having a long durability and a long service life.

20

According to a second aspect of the present invention, the use of a high temperature and corrosion resistant filter for the filtration of hot gases is described.

25

A filter made from the above described Fe-Cr-Al based alloys withstands temperatures up to 1100 °C.

Because of the presence of a sufficient thick and dense Al_2O_3 protection layer, there is no considerable corrosion observed. The presence of Y avoids the spalling of the oxide.

30

The filter shows a good resistance in an oxidising environment at high temperatures, for example at 900 °C.

The desired resistance in a reducing environment at these high temperatures is obtained as well.

5 Filters according to the present invention may withstand the combustion temperature of coal. They may therefore successfully be integrated in coal-fired power generation systems.

The filters are in particular suitable for the filtration of hot gases in pressurized fluidized bed combustor (PFBC) based systems, integrated gasification combined cycle (IGCC) based systems and hybrid cycle
10 based systems.

The use of filters according to the present invention in coal-fired power generation systems results in an improved method for the filtration of coal-derived gases.

15 In a first step of this method a coal-derived gas is produced. This coal-derived gas is then filtered in a second step by means of a filter system comprising a number of the above described filters.

Since the filter may resist high temperatures, the filtration of the coal-derived gas may be carried out at temperatures up to 850 °C and even
20 at higher temperatures, for example at 900 °C.

Because the filtration can be carried out at temperatures near the combustion temperature of coal, cooling of the gas before the filtration is superfluous. This results in a simplified installation and in a less expensive process.

25 Moreover the yield of the process is increased. Because of the high inlet temperatures to the turbine, IGCC and PFBC systems with efficiencies of over 40 %, for example over 45 % can be reached. Because the pressure drop of the filter medium according to the invention is low, the necessary total filter surface of an installation is low.
30 Accordingly, the number of filter elements is much lower than in the case conventional ceramic filters are used, which reduces the cost of the filter system.

-9-

As filters comprising metal fibers may withstand frequent thermal cycles, and as these filters may easily be cleaned, for example by pulse cleaning, the filters have a long service life. The frequency of replacement is thus considerably decreased, for example in comparison with ceramic filters or with filters comprising metal powder. This has a direct influence on the process and on the operational costs of production. After all replacing a filter medium is not only labour intensive but requires the interruption of the process and the cooling of the installation.

10

According to a further aspect of the invention a method of manufacturing a high temperature and corrosion resistant filter is provided. The method comprises the following steps :

providing a first layer of metal fibers;
if the filter medium comprises a second layer : providing a second layer of metal fibers and stacking up the first and second layer to form a layered structure;
sintering the first layer of metal fibers in the case there is only one layer or sintering the layered structure in the case there are more layers to form a sintered filter medium;
compacting the sintered filter medium;
welding the sintered and compacted filter medium to form the filter;
preoxidising the filter.

Preferably the compacting step is done by means of a cold isostatic pressing operation.

In an alternative method, each web is sintered and compacted in advance. Thereafter, the different layers are stacked up to form a layered structure. The obtained layered structure is then sintered in a subsequent step.

-10-

A mesh may be fixed to the filter medium before the sintering of the obtained layered structure. The mesh may be fixed at the flow out side of the layer of metal fibers or at the flow out side of the layered structure comprising different layers of metal fibers.

5 In another embodiment the mesh is put inbetween a first and a second layer of metal fibers.

To improve the resistance of the filter, the filter may be preoxidised. This preoxidation step is preferably carried out in clean air at a temperature
10 between 1000 °C and 1200 °C and more preferably between 1100 °C and 1200 °C. The duration of the preoxidation may vary from 15 minutes to 3 hours. Preference is given to a preoxidation time from 2 till 3 hours. To accelerate the formation of the Al_2O_3 layer and to improve the quality of the Al_2O_3 layer, oxygen enriched air can be introduced in the furnace
15 in which the oxidation is carried out.

Brief description of the drawings.

The invention will be described into more detail with reference to the accompanying drawing wherein
20 FIGURE 1 shows a filter candle according to the invention.

Description of the preferred embodiments of the invention.

Referring to figure 1, a corrosion and high temperature resistant filter candle 10 is provided. All elements which are part of this filter candle, such as the filter medium 12 and the filter caps 14, are made from
25 Fecralloy. The alloy comprises 0.30 % Y.

The filter medium is a layered structure comprising two layers. The filter medium may be supported, for example by a perforated tube 18. The first layer is a web of fibers with a diameter of 12 μm . This first layer has a weight of 600 g/m².
30

The second layer is a web of fibers with a diameter of 22 μm . The weight of the second layer is 450 g/m².

-11-

The first and the second layer are brought into contact with each other and are sintered. The sintered filter medium is then compacted by a cold isostatic pressing operation.

5 The thus obtained filter medium has a weight of 1050 g/m², a thickness of 0.58 mm and a porosity of 77.26 %.

The sintered filter medium is welded to form the filter candle. The filter candle has an overall length of 1.50 m and an outside diameter of 60 mm.

10 In a subsequent step the filter is preoxidised to form an Al₂O₃ layer on the surface by putting the filter in a furnace at a temperature of 1100 °C during 2 hours.

15 In operation, the dirty gas flows through the filter medium from the outside to the inside of the candle. The clean gas leaves the candle through the opening. The direction of the gas flow is indicated by the arrows in figure 1.

20 The above described filter medium has been subjected to a conventional textest for measuring the air permeability and to a bubble point pressure test. The results are shown in table 1. They are compared with the result of two other similar filter media, the one having a porosity of 77.1 %, the other having a porosity of 62.1 %.

25 The tested filter media are all composed of two layers of metal fibers. The first layer comprises fibers with a diameter of 12 µm and has a weight of 600 g/m². The second layer comprises fibers with a diameter of 22 µm and has a weight of 450 g/m².

-12-

Table 1

	Medium 1	Medium 2	Medium 3
Weight (g/m ²)	1050	1050	1050
Thickness (mm)	0.58	0.45	0.35
Global porosity (%)	77.26	77.1	62.1
Textest			
Average (liter/dm ²) at 200 Pa	260.67 (s = 6.02)	141.00 (s=13.62)	70.33 (s= 8.73)
Bubble point pressure test			
Average (Pa)	1547.50	1892.5	2210.0
Filter rating (μm)	33.91	19.55	16.74

- 5 To evaluate the temperature resistance and the behaviour of Fecralloy when subjected to thermal cycles, an aging test is carried out. A medium comprising Fecralloy fibers is considered in this test. The medium is first preoxidised at 1100 °C during 2 hours in a furnace. By this preoxidation an Al₂O₃ layer was formed on the surface of the
- 10 medium. XRD (X Ray diffraction) shows that the formed Al₂O₃ layer is α-Al₂O₃. By scanning microscopy a considerable increase of Al at the surface of the fibers could be observed.
- 15 The medium was then subjected to an aging test during one month. The medium was thereby alternately exposed to heating and cooling cycles. The heating periods take 8 minutes, the cooling intervals 2 minutes. During heating the temperature rose up to 1080 °C. After the test the samples were evaluated by visual inspection and by scanning microscopy.
- 20 Scanning microscopy showed an increase of Al at the surface of the fibers.

-13-

No damage of the medium was observed after a test period of one month.

5 To evaluate the corrosion resistance, samples of sintered Fecralloy fibers with a diameter of 12 μm and samples of sintered Fecralloy fibers with a diameter of 22 μm are subjected to a corrosion test. The composition of the Fecralloy was as follow : 15.8 % Cr, 4.8 % Al, 0.3 % Y 0.03 % C, the balance is Fe.

10 Both preoxidised and non preoxidised Fecralloy samples were considered in the test. The preoxidation was carried out at 1100 °C during 15 minutes.

For the corrosion test, the samples were exposed during 1000 hours to the combustion atmosphere of a fuel containing 1 % S, resulting in a SO₂ content of 280 ppm. The temperature of the gas was about 600 °C.

15 In a first test there was no HCl present, in a second test 100 ppm HCl was added to the atmosphere. The samples were subjected every 24 hours to thermal cycles from room temperature to 600 °C.

The results of these samples were compared with samples comprising other sintered metal fibers such as AISI 310, Inconel® and Hastelloy®

20 fibers, having the same diameters as the Fecralloy fibers, 12 μm and 22 μm .

After the corrosion test the degree of corrosion was evaluated by visual inspection of the samples, by comparison of the weight of the samples before and after the test and by the study of the results of optical

25 microscopy.

The samples of Fecralloy showed superior corrosion and heat resistance if compared with the other stainless steel samples. When the non pretreated and the preoxidised Fecralloy samples were compared, the preoxidised samples showed the best resistance either in an

30 environment containing HCl or in an environment without HCl.

XRD (X Ray diffraction) showed that the protective oxide layer formed on the surface of the preoxidised samples is $\alpha\text{-Al}_2\text{O}_3$.



CLAIMS

- 5 1. A high temperature and corrosion resistant filter (10) comprising a
filter medium (12) and filter caps (14), said filter medium comprising
at least one layer, said layer being a web of metal fibers which has
been sintered, said filter caps and said metal fibers being made from
an Fe-Cr-Al based alloy, said alloy having one of the following
compositions
- 10 - 15 to 25 % Cr, 4 to 6 % Al, at least one additional element selected
from the group consisting of Sc, Y, Ti, Zr, Hf, V, Nb, Ta and the
lanthanides, the remainder being Fe;
- up to 15 % Cr, 20 to 60 % Al, at least one additional element
selected from the group consisting of Sc, Y, Ti, Zr, Hf, V, Nb, Ta and
the lanthanides, the remainder being Fe.
- 15 2. A filter according to claim 1, whereby the metal fibers have a
diameter between 4 μ m and 30 μ m.
- 20 3. A filter according to claim 1, whereby said medium comprises at least
a first layer and a second layer, said first layer comprises a web of
metal fibers with a diameter between 4 μ m and 12 μ m, said second
layer comprises a web of metal fibers with a diameter between 12
 μ m and 30 μ m, the first and second layer are brought into contact
with each other to form a layered structure, said layered structure is
25 sintered.
4. A filter according to claim 1 or 3, whereby the filter medium has a
porosity between 60 and 85 %.
- 30 5. A filter according to anyone of claims 1 to 4, whereby a mesh is fixed
to the filter medium at the flow out side, said mesh is made from an
Fe-Cr-Al based alloy.

-15-

- 5
6. A filter according to claim 3, whereby a mesh is sandwiched between the first and the second layer of metal fibers before the medium is sintered, said mesh is made from an Fe-Cr-Al based alloy.
7. A filter according to anyone of claims 1 to 6, whereby the additional element is Y with a concentration between 0.03 and 0.5 %.
- 10
8. A filter according to claim 7, whereby the Y content ranges between 0.25 and 0.35 %.
9. A filter according to anyone of claims 1 to 6, whereby the sum of the additional elements is between 0.01 and 1 %.
- 15
10. A filter according to anyone of claims 1 to 9, whereby an Al_2O_3 layer is formed on the surface of said filter.
11. A filter according to claim 10, whereby said Al_2O_3 layer is predominantly $\alpha\text{-Al}_2\text{O}_3$.
- 20
12. A filter according to anyone of claims 1 to 11, whereby said filter is a candle filter or a tubular filter.
13. A filter system, comprising a number of filters according to claim 12.
- 25
14. The use of a high temperature and corrosion resistant filter according to anyone of claims 1 to 12 for the filtration of hot gases up to temperatures higher than 850°C .
- 30
15. The use according to claim 14, for the filtration of hot gases in coal-fired power generation systems.

-16-

16. A coal-fired power generation system comprising means for the production of coal-derived gas and a filter system for the filtration of said coal-derived gas, said filter system comprising a number of filters according to any one of claims 1 to 12.

5

17. A method of increasing the yield of a coal-fired power generation system, said method comprising the steps of :
producing coal-derived gas;
filtering said coal-derived gas up to temperatures higher than 850 °C
by means of a filter system comprising filters according to any one of claims 1 to 12.

10

18. A method of manufacturing a high temperature and corrosion resistant filter, said method comprising the following steps :
providing a first layer of metal fibers;
if the filter medium comprises a second layer : providing a second layer of metal fibers and stacking up the first and second layer to form a layered structure;
sintering the first layer of metal fibers in the case there is only one layer, or the layered structure in the case there are more layers to form a sintered filter medium;
compacting the sintered filter medium;
welding the sintered and compacted filter medium to form the filter;
preoxidising the filter.

15

20

25

19. A method according to claim 19, whereby the preoxidation is carried out at a temperature between 1100°C and 1200°C.



EPO - DG 1

-17-

18. 06. 1999

(90)

ABSTRACT :

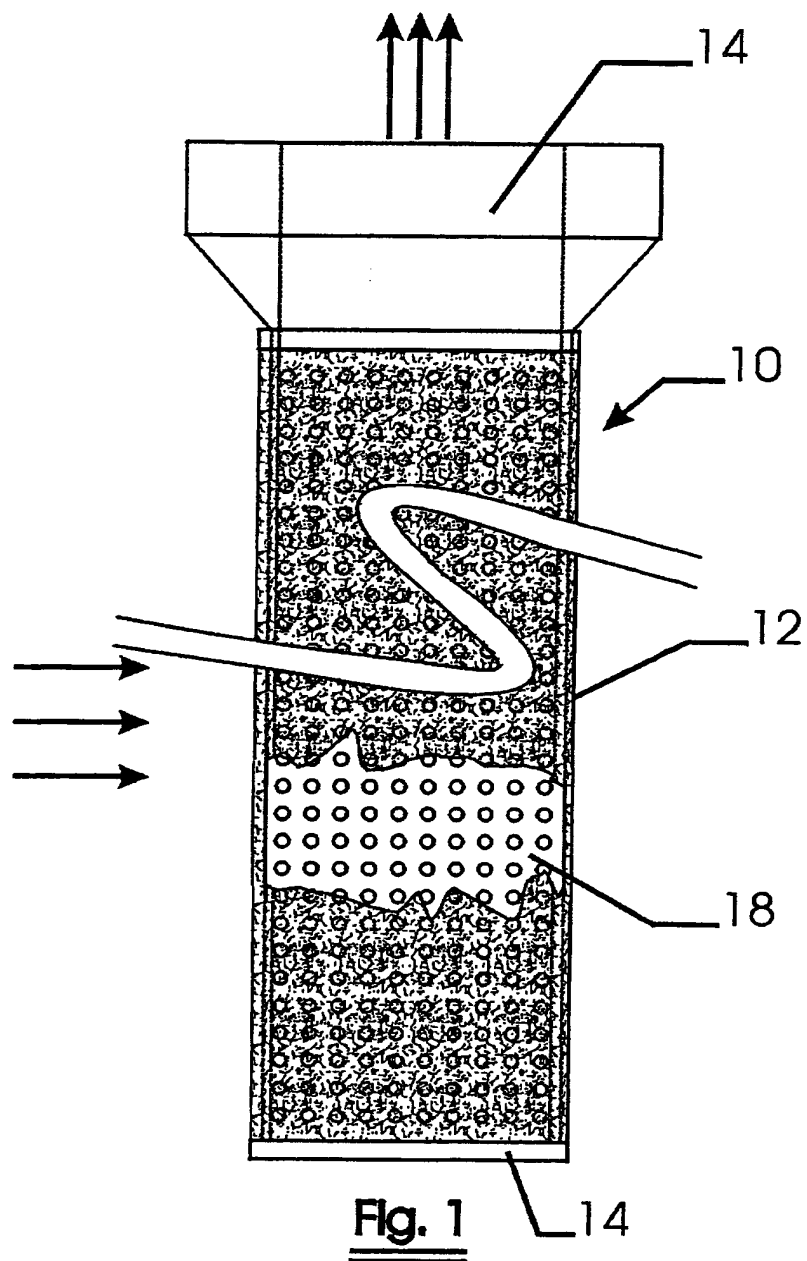
5 A high temperature and corrosion resistant filter (10) comprises a filter medium (12) and filter caps (14). The filter medium comprises at least one layer of metal fibers. The filter caps and metal fibers are made from an Fe-Cr-Al based alloy further comprising at least one additional element selected from the group consisting of Sc, Y, Ti, Zr, Hf, V, Nb, Ta and the lanthanides.

10 The filter is suitable for the filtration of hot gases, for example in coal-fired power generation systems.

18. 06. 1999

-18-

(90)

Fig. 1

